


AGRO-LINE

FOOD INDUSTRY VALVE

AGRO-LINE butterfly valves are specially designed for food and beverage applications. The large range of rubber seats, FDA or CE1935/2004 approved, allows us to adapt valve construction to your application. With 130 years experience in this field, and with our continuous development efforts, Buracco guarantees reliability, perfect shut-off, durability as well as significant energy savings.

TECHNOLOGY

- ✓ **Notched** aluminium hand lever, can be **locked out**, ergonomic design
- ✓ Plate **standardised** in accordance with EN-ISO 5211
- ✓ **Epoxy** coated body for an **excellent corrosion resistance**
- ✓ Non-ejectable stem for **optimum security**
- ✓ High collar for insulation
- ✓ Hollow neck to **prevent seizing**
- ✓ **Self-lubricating bearings** for an **ideal shaft coaxiality** and **optimized torque**
- ✓ Seat anchored in the body and self-centering disc guarantee a **low and constant torque** and a **durable seal**
- ✓ Moulding and spherical machining of the seat / valve body contact zone for a **perfect seal**
- ✓ Seat bossed at valve stems to eliminate the risk of external leaks
- ✓ Secondary O-rings for **additional safety**

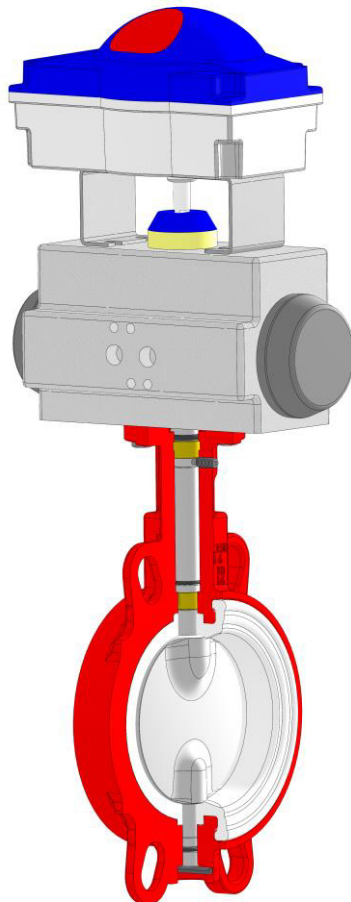

Profiled disc for an **increased flow rate coefficient (Kv) (*)**



Ductile iron body as standard for **increased resistance**




100% product testing to **guarantee performance**



A **premium service** through customer liaison and technical assistance

() Depending on operating conditions, the annual energy savings can be higher than the cost of the valve.*

PERFORMANCE

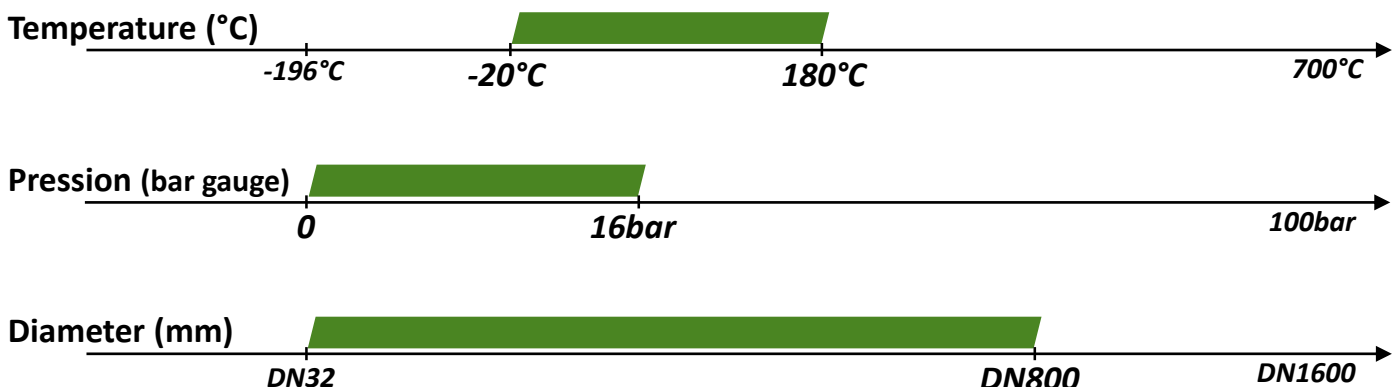

The maximum pressures and temperatures depend on the pressure/temperature relationship and type of fluid.

CONSTRUCTION

Body	DUCTILE IRON ENJS1030 + EPOXY					
Liner	WHITE EPDM FDA	BLACK EPDM FDA	WHITE NBR FDA	TRANSPARENT SILICONE	VITON FDA®	FLUCAST AB/E
Disc	STAINLESS STEEL A351 CF8M	STAINLESS STEEL A351 CF8M	STAINLESS STEEL A351 CF8M	STAINLESS STEEL A351 CF8M	STAINLESS STEEL A351 CF8M	STAINLESS STEEL A351 CF8M
Body type	Wafer or Lug					
Operation	Aluminium hand lever, manual gear box, pneumatic and electric actuators					

Design

- Designed in accordance with standard EN 593
- Face-to-face in accordance with standard EN 558+A1 base 20


Seal

- In accordance with standard EN 12266-1 Rate A

Approvals

- PED 2014/68/UE
- FDA and CE 1935/2004 approved liner type

Main options

- ATEX construction 
- Mirror polished disc
- Order conformity certificate / material certificate / pressure test certificate in accordance with standard EN 10204 types 2.1, 2.2 and 3.1
- ...



Wafer



Lug



CHARACTERISTICS

Components	Material	Description	Benefit
Body	DUCTILE IRON ENJS 1030	Spheroidal graphite ductile iron has a superior mechanical strength than lamellar graphite cast iron.	Increased safety for personnel and equipment
Coating	EPOXY	The EPOXY coating guarantees excellent corrosion resistance .	Maintains product integrity and facilitates cleaning
Liner	BLACK EPDM FDA	Multipurpose elastomer food industry compliant	Optimized liner selection for durable performance
	WHITE EPDM FDA	White elastomer offering similar characteristics to black FDA EPDM.	
	WHITE NBR FDA	Elastomer compliant for food oil applications .	
	TRANSPARENT SILICONE	Transparent elastomer food industry compliant.	
	VITON FDA®	Food industry compliant elastomer, high temperatures resistant .	
	FLUCAST AB/E	Food industry compliant elastomer for abrasive applications .	
Disc	ASTM A351 CF8M	This grade of stainless steel has excellent corrosion resistance and is alimentary compliant	Uncoated stainless steel
Stem and Pivot	1.4021 / 1.4028 (Inox 13% Cr)	The shafts have excellent mechanical strength and benefit from corrosion resistance of 13% Cr stainless steel.	Lasting integrity of the shaft line
Bearings	COMPOSITE THERMOPLASTIQUE	Corrosion resistant, self-lubricating bearings with excellent mechanical characteristics	Torque stability and lasting of the shaft line



Energy savings

33%

Average increase in Kv coefficient compared to one-piece shaft design.